



DTU i Kongens Lyngby

Fire Rated Door


Aluflam AF88 glass fire doors are high performance, thermally broken narrow aluminium frames with its cavity filled with patented fire retardant cooling core.

Incorporating extensively tested fire resistant glazing, the AF88 single door system can be used internally up to 60 minute fire ratings.




- Inward and outward opening version
- Single and double door versions
- For internal and external usage
- System depth 88 mm
- Glass thickness up to 60 mm
- Concealed, surface and roller type of hinges

Frame / Door

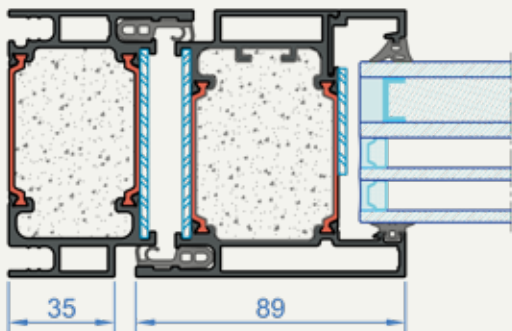

Transom

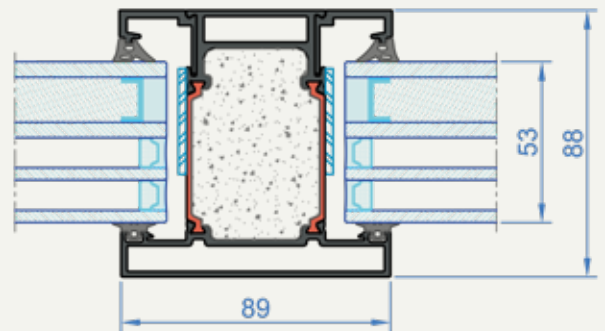

Fire resistance class:	EI60
Functionality:	single and double doors
Opening:	inward and outward
Building depth:	88 mm
Material:	Aluminium RAL/anodized