



Fire Rated Doors & Windows


Our fire windows comply with EN 12600 safety glass standards and have excellent clarity and noise reduction. The glasses can be assembled with profile or can be assembled in a butt-joint system solution for glazed walls.

Available in fire class E/EW/EI 30, 45, and 60 with 30, 45, and 60 minutes fire protection, respectively. Products are fully tested in a number of European laboratories and EN standards.




- ALUFLAM AF85 sliding system can be produced with integrated glass doors or flush doors up to EI60
- Single or double sliding system
- Large glass areas
- Narrow profiles
- Good sound resistance
- Ready for glass-to-glass joints (Butt-Joint)
- Available in single and multiple window panel design
- Simple assembly
- Can be manual, semi-automatic, or automatic

Door

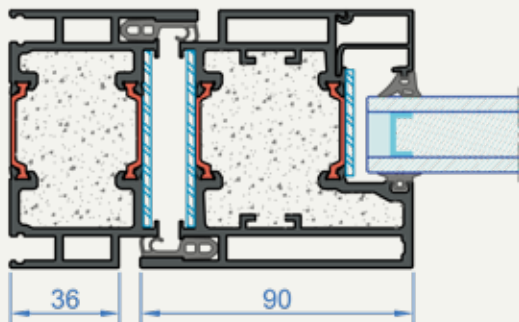

Mullion

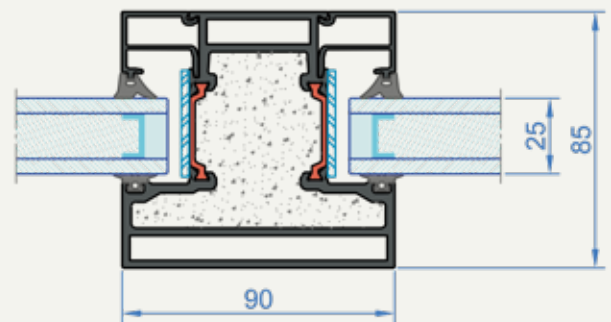

Fire resistance	E30 - EI60
Reference Test	IFCA 08110 IMO A754 (18) / BS 476 part 22
Sound	Up to 46 dB
Maximal width	1200 mm (per glass field)
Minimal height	2050 mm (per glass field)
Profile height / depth	62 / 85 mm
Surface finishing	RAL, NCS, anodizing