



Codan Hus in Copenhagen

Fire Rated Doors & Windows


Our fire windows comply with EN 12600 safety glass standards and have excellent clarity and noise reduction. The glasses can be assembled with profile or can be assembled in a butt-joint system for a glazed wall solution.

Available in fire class EW/EI 90 and E/EW120 with 90 and 120 minutes fire protection, respectively. Products are fully tested in various European laboratories and EN standards.




- System AF91 can be done with integrated glass doors and flush doors up to EI60
- Large glass areas
- Narrow profiles
- Good sound resistance
- Ready for glass-to-glass joints (Butt-Joint)
- Available in single and multiple window panel design
- Simple assembly
- Fire classification up to EW120

Door

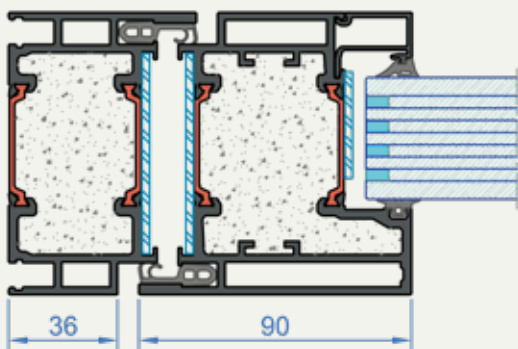

Mullion

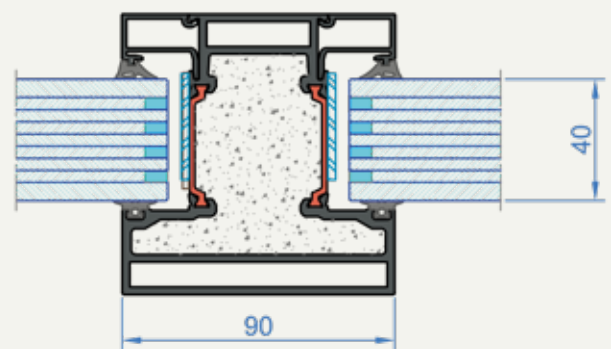

Fire resistance	EW90 - EW120
Reference Test	EN 1634-1: LPP02_2526_12_Z00NP
Sound	Up to 46 dB
Maximal width	965/971 mm (per glass field)
Minimal height	2100/2002 mm (per glass field)
Profile height / depth	62 / 93 mm
Surface finishing	RAL, NCS, anodizing