



Codan Hus in Copenhagen

## Fire Rated Doors & Windows


Our fire windows comply with EN 12600 safety glass standards and have excellent clarity and noise reduction. The glasses can be assembled with profile or can be assembled in a butt-joint system for a glazed wall solution.

Available in fire class EW/EI 90 and E/EW120 with 90 and 120 minutes fire protection, respectively. Products are fully tested in various European laboratories and EN standards.




- System AF91 can be done with integrated glass doors and flush doors up to EI60
- Large glass areas
- Narrow profiles
- Sound reduction - up to 45 dB
- Ready for glass-to-glass joints (Butt-Joint)
- Available in single and multiple window panel design
- Simple assembly
- Surface finishing - powder coating (RAL, NCS), anodizing

Door

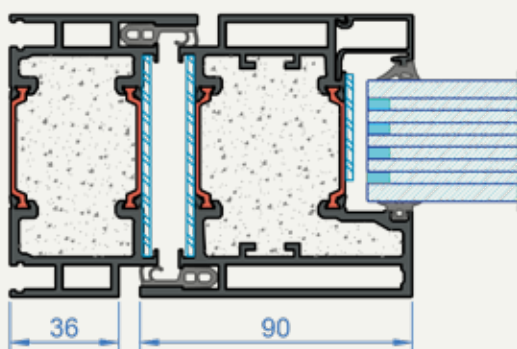

Mullion

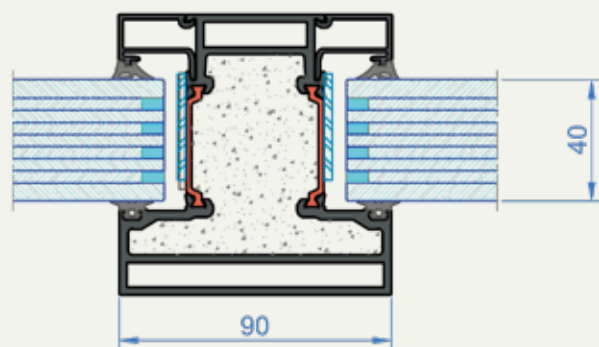

Fire resistance	EI60 - EI90 - EW120
Tested glass	Contraflam 60-90, Pyrostop 60-90
Maximal size	965(971) x 2100(2002) mm, per glass field
Minimal size	700 x 700mm
Frame depth / Sightline	93 mm / 90 mm
Maximal glazing thickness	46 mm
Functionality	single, double doors, partitions