



## Primary window system

Our WUBERN Window system is a primary solution dedicated to residential or public buildings e.g.: offices, schools, hotels, hospitals or shopping malls.

The standard sight line is 96 mm, there is also the SLIM version with only 127 mm to achieve the modern look. The vent and frame are constructed of a multi-chamber aluminium profile, to provide good thermal performance.




# Primary window system


WUBERN Window

- **Numerous applications** - general-use system for public and residential
- **Air permability** - CLASS 4 (600 Pa)
- **Water tightness** - E1050 (1050 Pa)
- **Resistance to windload** - C4/B4 (1600Pa)
- **Impact resistance** - E5/I5 (950 mm)
- **Two sight line widths** - 95 mm as a standard, 46 mm for structural glazing
- **Numerous colours and finishes** – aluminium profiles available in diverse RAL colours and anodised

standard glazing

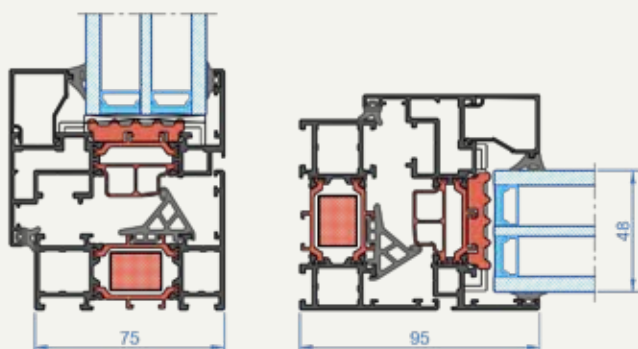

structural glazing (SG)

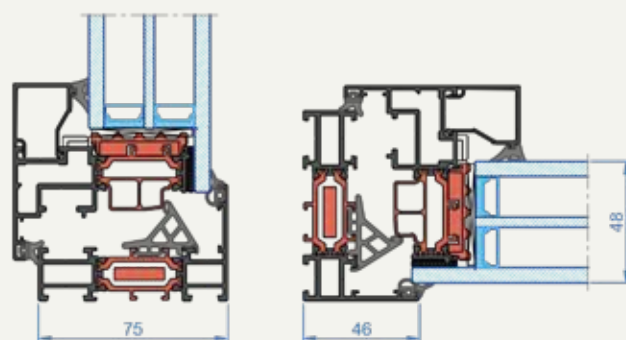

Frame depth	75 mm
Sight line height	95 mm or 46 mm (SG)
Sight line type	stright
Glazing type	TGU
Maximum glazing thickness	70 mm
Heat transfer Uf	2,00 W/m <sup>2</sup> K
Maximum sash weight	130 kg

ALUFLAM A/S  
Langebjergvænget 13  
4000 Roskilde  
DENMARK

Tel. +45 46 75 06 11  
Fax +45 46 75 08 11  
E-mail: info@aluflam.dk  
VAT Reg No 20675136

**ALUFLAM**<sup>®</sup>  
GROUP