



Glazing solutions experience built since 1943

A+ Windows Family

Our A+ Windows system offer high performance, durability and aesthetics for various applications. They are available in different sight line type and height, glazing options and opening types.

A+ Windows were designed to deliver narrow aluminium framing, available in numerous variants and frame depths with a choice of colours and finishes.



A+85

A+ Windows Family (Inward Opening)

| | A+ 65 | A+ 75 | A+ 85 | A+ 95 |
|----------------------------|---|---|---|---|
| Frame depth (mm) | 65 | 75 | 85 | 95 |
| Sight line type | stright | bevel | stright | bevel |
| Sight line height (mm) | 54 | 54 | 54 | 54 |
| Glazing type | DGU | DGU | TGU | TGU |
| Max. glazing thicknes (mm) | 31 | 31 | 51 | 51 |
| Uw (size 1230x1480mm) | 1,44 | 1,45 | 0,86 | 0,86 |
| 2D drawing |  |  |  |  |
| 3D view |  |  |  |  |

Opening types: turn/tilt, tilt/turn, turn, tilt
 Maximal vent weight: 130 kg (286 lb)




A+ Windows Family (Inward Opening)

| A+ 149 | A+ 149 Bella | A+ 159 | A+ 174 | A+ UNI | A+ UNI SL |
|---|---|---|--|---|---|
| 149 | 149 | 159 | 174 | 85 | 101 |
| stright | stright | bevel | stright | industrial | industrial |
| 54 | 75 | 54 | 54 | 41 | 41 |
| TGU | DGU | TGU | TGU | TGU | TGU |
| 51 | 31 | 51 | 51 | 51 | 51 |
| 0,87 | 0,88 | 0,88 | 1,62 | 0,95 | 0,95 |
|  |  |  |  |  |  |
|  |  |  |  |  |  |



The newest ALUFLAM plant with its own aluminum extrusion line

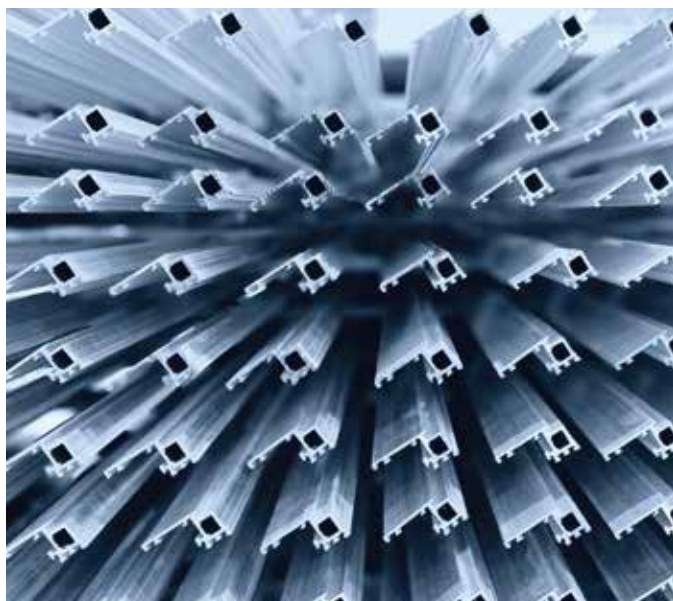

The photos above present our new production facility in Jonava (Lithuania), which opened in 2022. Due to the continuous development of the ALUFLAM company, we built this plant for concentrating our own line for extrusion of aluminum profiles, an ecological powder paint shop, a machine room, a department based on modern CNC machines and product assembly in one place.

ALUFLAM A/S
Langebjergvænget 13
4000 Roskilde
DENMARK

Tel. +45 46 75 06 11
Fax +45 46 75 08 11
E-mail: info@alufлам.dk
VAT Reg No 20675136

ALUFLAM[®]
GROUP