



Fire rated sliding doors EI60


Our wall-mounted fire-rated sliding doors offer robust external protection with EI60 certification, ensuring 60 minutes of fire resistance. Designed for smooth operation, they blend safety with architectural elegance. Ideal for commercial settings, these doors provide reliable security without compromising on aesthetic appeal.

The system incorporates with a wall, facade or fixed partition.




- EI60-certified for 60 minutes of fire resistance.
- Attractive sightline of the system profiles: 87 mm.
- Designed for enhanced safety in commercial settings.
- Smooth, effortless sliding mechanism.
- Ideal for high-traffic areas needing fire-rated solutions.
- Compact, wall-mounted design saves floor space.
- Suitable for indoor and outdoor applications.
- Good sound resistance.
- Surface finishing - powder coating (RAL, NCS), anodizing.

Horizontal cross-section

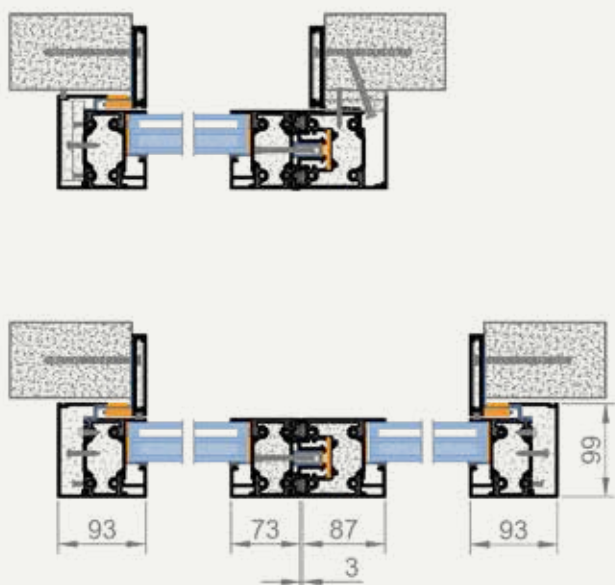

Vertical cross-section

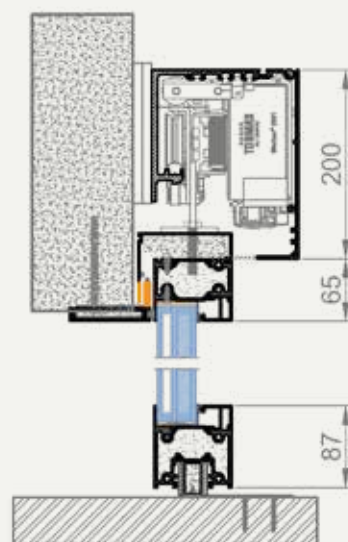

Fire resistance	EI30, EI60
Tested glass	ESG5 / 18 / Fireblock 60
Tested glass pane size	950 mm x 2235 mm (WxH)
Tested glass door leaf	1073 mm x 2372 mm (WxH)
Frame Depth / Sightline	82 mm / 87 mm